
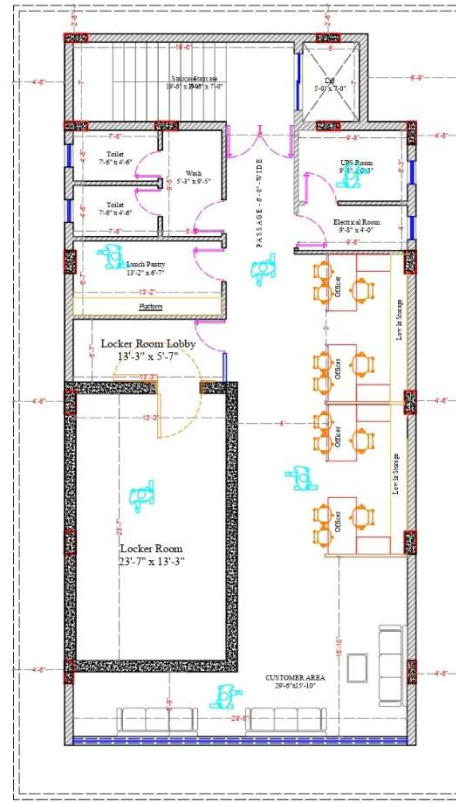


STATE BANK OF INDIA
REGIONAL BUSINESS OFFICE – 3, VISAKHAPATNAM

**INTERIOR FURNISHING WORKS FOR PROPOSED
MADHURAWADA BRANCH**

**BILL OF QUANTITY
PRICE BID**

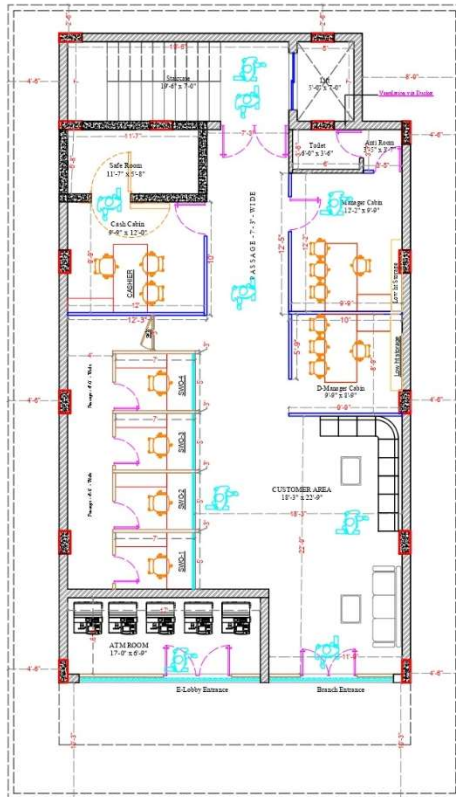

PROJECT:

**Proposed Interior Layout Plan
For SBI at Madurawada Branch
and Atm.**

SHEET TITLE:

PROPOSED INTERIOR LAYOUT PLAN

1. This Drawing is the property of Burman EtAl. No portion of this drawing should be copied or used elsewhere without the permission of the Architect.
2. Only written dimension to be followed and should not be scaled.

OPTION-3

Date: 16-04-2026

Drawn: Aishwarya

Dealt: Pavan

Checked: J. Burman Roy

Sheet No: 01



BURMAN ET.AL

Architecture.Interior.Engineering.QAQC

3-131/2/A Ground Floor, Mallapur, Near Balapur, Beside
Balapur Police Station, Rr Dist Hyderabad. 500005 (M):
8125196178, 9553495945

mail: burmanetalhyd@gmail.com, burmanetal2008@gmail.com.

BOQ FOR INTERIOR WORK FOR STATE BANK OF INDIA, MADHURAWADA BRANCH, MADHURAWADA, ANDHRA PRADESH.					
SCHEDULE OF QUANTITIES AND DETAILED SPECIFICATIONS: (INTERIOR WORKS)					
S.No.	Item. / Particulars.	QTY	Rate.	Unit.	Amount.
I	INTERIOR WORKS:				
1.0	FIXED FURNITURE:				
1.1	FULL HEIGHT PARTITIONS:	58.00		Sq.M.	
	Providing and fixing metal stud dry wall partition with following specifications: The Partition will be fully opaque OR partly opaque and partly glazed as per specific site conditions and drawings. (a) Supporting system comprising of 51mm / 50mm x 35mm / 34mm x 0.5mm metal studs at 600mm c/c and 51mm / 50mm x 32mm x 0.5mm metal tracks at floor, middle, door and ceiling level with joints staggered to avoid through joints. The vertical members should touch the ceiling with horizontal ceiling channel at slab / beam bottom. The rate should also include necessary strengthening with studs / tracks or channels at doors and other openings. (b) 12mm Plywood/HDHMR BWR Grade Board /Fiber Cement Board / Calcium Silicate Board / Reinforced Magnesium Silicate Board fixed on both sides with 25mm dry wall screws for the entire height of the partition. (c) Partition from floor level upto 2350mm level to have 8mm x 100mm Fiber Cement Board / Calcium Silicate Board / Reinforced Magnesium Silicate Board as Skirting clad with 1mm glossy Laminate (blue color) at bottom + from 100mm to 300mm level to have 1mm Glossy Laminate (blue color) + from 300mm level to 950mm level to have 1mm Glossy Laminate (white color) + from 950mm level to 1100mm level 1mm Glossy Laminate (blue color) + from 1100mm level to 2250mm level to have 1mm Textured Glossy Laminate (white color) + from 2250mm level to 2350mm level 1mm Glossy Laminate (blue color) on both sides as shown in drawing. (d) Partition to have 8mm clear float glass instead of 1mm Textured Glossy Laminate fixed with 85mm x 18mm around HDHMR BWR Grade jamb and 12mm x 12mm HDHMR BWR Grade button beading on both sides of the glass, to a neat finish as per drawings and directions etc., complete. (e) Partition to have 1mm Laminate / NO VOC or LOW VOC plastic emulsion paint finish on both sides as shown in drawing. (f) All exposed surfaces of HDHMR BWR Grade members to have minimum two coats of LOW VOC or NO VOC duco paint finish. (g) All sections used should adhere to the manufacturers guidelines and the contractor has to submit certificate from the manufacturer on usage of their specified sections.				
1.2	35MM THICK FLUSH DOORS IN PARTITIONS: (BOTH SIDE LAMINATE FINISH.)	13.00		Sq.M.	
	Providing and fixing 35mm thick solid core flush shutter with Fiber Cement Board / Calcium Silicate Board / Reinforced Magnesium Silicate Board with 1mm Laminate (Base Rate RS. 500/- Sq.M.) from both sides with 100mm x 15mm beech wood jamb around the opening of the partition and 12mm x 12mm button beading on one side of the partition and 8mm clear float glass with 3M privacy film fixed as per drawing with 65mm x 15mm beech wood jamb around the glass opening and 12mm x 12mm beech wood beading for fixing of glass on both sides. The rate to include necessary hardware viz., door stopper, door buffer, pair of " H " type handles, Mortise Dead Lock and Euro Profile Cylinder - Key and Knob 70mm SS, 4 Nos. SS 2 ball-bearing hinges - (127mm x 76mm x 2.5mm), door closer (all of approved make and quality), all exposed faces of Veneer and beech wood beading to have minimum three coats of melamine spray polish finish etc., complete as directed.				
1.3	HALF HEIGHT PARTITIONS: (LAMINATE FINISH)	43.00		Sq.M.	
	Same as item 1.1 above, but for height of 1200mm from finished floor level, to a neat finish as per drawings and directions etc., complete and the				

	following: (a) 12mm x 75mm capping of HDHMR BWR Grade Board on top, 38mm x 12mm bands of HDHMR BWR Grade Board on both sides of the partitions horizontally and vertically upto skirting finished with minimum two coats of LOW VOC or NOW VOC duco paint as per drawings and directions etc., complete. (b) Partition from floor level upto 1200mm level on both sides to have 8mm x 100mm Fiber Cement Board / Calcium Silicate Board / Reinforced Magnesium Silicate Board as Skirting clad with 1mm glossy Laminate (blue color) at bottom + from 100mm to 300mm level to have 1mm Glossy Laminate (blue color) + from 300mm level to 950mm level to have 1mm Glossy Laminate (white color) + from 950mm level to 1050mm level 1mm Glossy Laminate (blue color) + from 1050mm level to 1100mm level to have 12mm thick HDHMR BWR Grade Board on both sides finished with minimum two coats of LOW VOC or NOW VOC duco paint as shown in drawing. (c) The cost to include all materials and hardware required etc., as per site conditions. The rate is for a finished item of work etc., complete as directed.				
1.4	FIXED GLASS WORKS: (12MM TOUGHENED GLASS WORK WITH MAIN ENTRANCE DOOR AND GLASS PARTITION DOORS)	21.00		Sq.M.	
	Providing, making and fixing in position Fixed 12mm / 10mm toughened glass as fixed glass from Floor to available Ceiling level along with Main Entrance Door and for Partitions. The glass is to be fixed with patch fittings and all the edges of the glass have to be polished for a smooth finish. The work includes cost of all materials, approved hardware, making necessary template before toughening of glass and fixing the same as per site conditions to a neat finished work as per drawings and directions etc., complete.				
1.5	12MM TOUGHENED GLASS MAIN ENTRANCE DOOR AND PARTITION DOORS:	32.00		Sq.M.	
	Providing, making and fixing in position Fixed 12mm toughened glass openable shutters work as per specifications given below and for the openings mentioned. Main Entrance Glass Work comprising of Door opening of approximate size 1800mm x 2250mm - 2400mm in two pieces, and Partition Doors of approximate size 900 - 1000mm x 2250mm - 2400mm. The entire work to be done as per site conditions with following specifications etc., complete as directed.				
	(a) Entrance door - Providing, fixing in position glazed entrance Double door and Single door with patch fitting or approved make (Double Door approx. Size: 1800mm - 1500mm x 2400mm - 2250mm and Single Door approx. Size: 900mm - 12mm x 2400mm - 2250mm) using 12mm / 10mm toughened glass edge polished. The Door to consist of Heavy Duty Floor spring, Upper Patch, Bottom Patch, Lock Keeper Plate, Euro Profile Cylinder (EPC), "H" Type Handle 32 x 600mm, Corner Lock and the side fixed glass to have 2 Nos. Bottom Patch and 2 Nos. Upper Patch for each door to a neat finish etc., complete as per drawing. (b) The work includes cost of all materials, approved hardware, making necessary template before toughening of glass and fixing the same as per site conditions to a neat finished work as per drawings and directions etc., complete.				
1.6	WALL PANELLING:				
1.6.1	WALL PANELLING: (LAMINATE FINISH)	23.00		Sq.M.	
	Same as item 1.1 above, but for Wall Panelling. The basic frame work to comprise all cladding specified only from one side to a neat job as per drawings and directions etc., complete.				
	(a) Providing 18mm thick HDHMR BWR Grade jamb for door and window openings of suitable depth as per site conditions.				
	(b) All exposed surfaces of HDHMR BWR Grade members to have NO VOC or LOW VOC duco paint finish.				

1.6.2	COLUMN PANELLING: (LAMINATE FINISH)	16.00		Sq.M.	
	Same as item 1.6 above to be clad with 1mm Laminate (Laminate Base Rate Rs - 500/- Sq.M.) from one side to a neat finish as per drawings and directions etc., complete.				
1.7	STORAGE UNITS: (6MM THICK ACRYLIC SOLID SURFACE) Providing, making and placing in position Storage Units with horizontal partitions of 1100mm abutting wall / abutting partition / 750mm as back credenza height made in 19mm plywood for all other members and 25mm block board for table top. The Storage Unit top of 25mm Block Board and to be clad with 6mm thick acrylic solid surface and 1mm Laminate in the front facia and sides of the top to have 6mm thick acrylic solid surface double thickness at edges alround. All other exposed faces of the unit to have 1mm Laminate as specified and 0.8mm Laminate finish on all unexposed faces and all necessary hardware viz., "W" or wing hinges, locks, handles, tower bolts etc., etc., complete. (a) All the edges of 19mm plywood to have 20mm x 6mm beech wood edge lipping. (b) All wooden members and faces of veneer to have melamine spray polish finish. Melamine Spray Polishing to be done as per specifications given in item 2.6 below.	19.00		Sq.M.	
1.8	FALSE CEILING WORKS:				
	Providing, making and fixing in position the following types of different false ceilings with different materials as specified below to be installed at different heights mentioned, for a finished item of work as per drawings and directions etc., complete.				
1.8.1	GRID FALSE CEILING:	141.00		Sq.M.	
	Providing & Fixing of Mineral Fibre Acoustical Suspended Ceiling System with 15mm Tiles and Exposed GRID. The tiles should have Humidity Resistance (RH) of 90% - 99%, NRC 0.5, Light Reflectance $\geq 87\%$, Thermal Conductivity $k = 0.052 - 0.057$ w/m K, Colour White, Fire Performance UK Class 0 / Class 1 (BS 476 pt - 6 & 7) in module size of 600 x 600 x 16mm, suitable for Green Building application, with Recycled content of 30% - 45% . The tile shall be laid on Microline / Silhouette profile grid system with 15mm - 16mm white flanges incorporating a 6mm central reveal in white/black colour and with a web height of 38mm and a load carrying capacity of minimum 8 Kgs/M2 & minimum pull out strength of 100 Kgs. Microline / Silhouette, Main Runners & Cross Tees to have mitred ends & "birdsmouth" notches to provide mitred cruciform junctions. The T Sections have a Galvanizing of 90 grams per M2 and need to be installed with Suspension system as per manufacturers details. The Instalation to comprise main runner spaced at 1200mm centres securely fixed to the structural soffit using US Boral / Gyproc / Armstrong suspension system (specifications below) at 1200mm maximum centre. The First/Last suspension system at the end of each main runner should not be greater than 450mm from the adjacent wall. Flush fitting 1200mm long cross tees to be interlocked between main runners at 600mm centre to form 1200 x 600 mm module. Cut cross tees longer than 600mm require independent support. 600 x 600mm module to be formed by fitting 600mm long flush fitting cross tees centrally between the 1200 mm cross tees. Perimeter trim to be Wall angles of size 3000mm x 19mm x 19mm, secured to walls at 450 mm maximum centres.				
1.8.2	PLAIN FALSE CEILING:	246.00		Sq.M.	
	Note: (No seperate measurements will be considered for the vertical up to 300mm height surfaces and cove lighting areas only plan are will be considered for the measurements) Providing and fixing Concealed Grid suspended ceiling system of 12.5mm Gypsum Boards / Standard Plaster Boards fixed to ceiling Frame Work as per manufacturers instructions and details for a concealed grid key lock suspended ceiling system consisting of following:				

	(a) 27 x 37 x 1.6mm Soffit Clip, 5mm suspension rod / 25 x 10 x 0.5mm Ceiling Angle, adjustable spring loaded suspension clip / 2.64mm dia Connecting Clip, 20 x 28 x 30 x 0.5mm Perimeter Channel, Top Cross Rail of 3000mm long of 0.55BMT Furring Channel / 15 x 45 x 15 x 0.9mm Intermediate Channel and 4000mm long made of 0.5mm BMT the Top Cross Rail / 80 x 26 x 0.5mm Ceiling Section to be suspended from ceiling at every 1200mm and Furring / Intermediate Channel to be fixed to Top Cross Rail / Ceiling Section at every 600mm to make a grid of 1200 x 600mm. (b) All sections used should adhere to the manufacturers guidelines and the contractor has to submit certificate from the manufacturer on usage of their specified sections. (c) Further the rates to include cutouts for lighting fixtures / AC grilles / Fire Alarm Detectors etc., along with necessary strengthening and supports for fixing of these. The board joints are to be flush finished with jointing compound and paper tape etc., complete as directed. The cost including 2 coats of wall care putty and one coat of primer and two coats of emulsion paint.				
1.8.3	PLYWOOD FALSE CEILING:	9.00		Sq.M.	
	Providing and making plywood ceiling with Trap Doors in Ceiling of approximate size 1800mm x 750mm made with 50mm x 50mm hard wood frame and shutter with hard wood frame of 35mm x 35mm with 19mm marine quality plywood / block board, the exposed surface of the ceiling to be clad with 1mm thick laminate of approved shade and painted with enamel paint internally with necessary hardware viz., hinges, safety chain, lock, handle etc., complete as per drawings and directions.				
1.10	LOOSE FURNITURE WORKS:				
	Providing, making and placing in position Executive Table and Side Table with following specifications and per dimensions specified. (a) Table top and the front around fascia of the table to be made in 25mm block board with 6mm thick acrylic solid surface and double thickness at edges around OR 1mm thick Laminate and all the exposed edges of the table to have 1mm Laminate or edge binding tape. (b) All other members 19mm plywood and all exposed faces of the table to have 4mm Veneer (Veneer Base Rate Rs - 1,500/- Sq.M.) OR 1mm Laminate (Laminate Base Rate Rs - 500/- Sq.M.) as specified above to be used. (c) All the edges of 19mm plywood to have 20mm x 6mm beech wood edge lipping. (d) One ready made key board tray. (Eco - KTE1 - 35 - Ebco make.) (e) One ready made hanging type pedestal for keeping CPU. (CPUSL, Ebco make.) (g) One Three Drawer Unit made with 19mm plywood and 12mm plywood. The unit to have one vertical filing drawer at bottom and two equal drawers on top. The rate to include all necessary hardware viz., telescopic drawer channels, handles, locks, etc., and 20mm x 6mm beech wood edge lipping etc., (h) All the exposed faces to have either 6mm thick acrylic solid surface OR 4mm Veneer (Veneer Base Rate Rs - 1,500/- Sq.M.) OR 1mm Laminate (Laminate Base Rate Rs - 500/- Sq.M.) of approved shade and make as specified above. (i) All the unexposed faces to have 0.8mm thick Laminate OR minimum two coats of enamel paint with putty finish. (j) A loose Ready Made Modular Foot Rest (FR2 - Ebco make.) to be provided for each table / work station. (k) All wooden members and faces of veneer to have melamine spray polish finish.				
1.10.1	CHIEF MANAGER'S EXECUTIVE TABLE AND SIDE TABLE: (2100mm x 900mm x 750mm + 1200mm x 450mm x 750mm) with 6mm thick acrylic solid surface	1.00		Each.	
	Same as item 1.10 above but for Executive Table and Side Table for the				

	Chief Manager of approximate size - 2100mm x 900mm x 750mm + 1200mm x 450mm x 750mm as per drawings and directions etc., complete for a finished item of work.				
	The cost to include 1mm Laminate (Laminate Base Rate Rs - 500/- Sq.M.) as specified above for a finished item of work as per drawings and directions etc., complete.				
1.10.2	MANGER'S TABLES: (1800mm x 750mm x 750mm + 1050mm x 450mm x 750mm) 6mm thick acrylic solid surface	1.00		Each.	
	Same as item 1.10 above but for Executive Table and Side Table approximate size - 1500mm x 750mm x 750mm + 1050mm x 450mm x 750mm as per drawings and directions etc., complete for a finished item of work.				
	The cost to include 6mm thick acrylic solid surface and 1mm Laminate (Laminate Base Rate Rs - 500/- Sq.M.) as specified above for a finished item of work as per drawings and directions etc., complete.				
1.10.3	OFFICERS'S TABLES: (1650mm x 750mm x 750mm + 1050mm x 450mm x 750mm) 6mm thick acrylic solid surface	6.00		Each.	
	Same as item 1.10 above but for Officer Table and Side Table of approximate size - 1650mm x 750mm x 750mm + 1050mm x 450mm x 750mm as per drawings and directions etc., complete for a finished item of work.				
	The cost to include 6mm thick acrylic solid surface and 1mm Laminate (Laminate Base Rate Rs - 500/- Sq.M.) as specified above for a finished item of work as per drawings and directions etc., complete.				
1.10.4	LINEAR WORKS TABLES with 6mm thick acrylic solid surface:	7.00		Rmt.	
	Providing, making and placing in position Linear work tables made in 25mm plywood / block board for table top and 75mm x 50mm with 6mm thick acrylic solid surface hardwood foot rest, including key board tray and vertical supports at approximately every 1200mm length. The Work Table top with 6mm thick acrylic solid surface and front fascia to have 1mm Laminate (Laminate Base Rate Rs - 500/- Sq.M.) and remaining all exposed faces to have 1mm Laminate (Laminate Base Rate Rs - 500/- Sq.M.) the wooden members to have melamine spray polish finish and the unexposed faces to have 0.8mm Laminate OR minimum three coats of enamel paint with putty etc., complete as directed. All faces of plywood to have 6mm beech wood lipping. The cost to include all necessary hardware viz., drawer channels, " W " hinges, SS handles, set locks etc.,				
	(a) One ready made key board tray. (Eco - KTE1 - 35 - Ebco make.)				
	(b) One ready made hanging type pedestal for keeping CPU. (CPUSL, Ebco make.)				
	(c) One Three Drawer Unit made with 18mm plywood and 12mm plywood. The unit to have one vertical filing drawer at bottom and two equal drawers on top. The rate to include all necessary hardware viz., telescopic drawer channels, handles, locks, etc., and 120mm x 6mm beech wood edge lipping etc.,				
	(d) All the edges of 19mm plywood to have 20mm x 6mm beech wood edge lipping.				
	(e) All wooden members and faces of veneer to have melamine spray polish finish.				
1.10.5	CUSTOMER TRANSACTION COUNTERS (SWO):	4.00		Each.	
	Providing, making and placing in position Single Customer Transaction Counters along with necessary partitions as per item 1.3 above (The partitions will be measured and paid as per item 1.3 i.e., Half Height Partitions) with following specifications and per dimensions specified.				
	(a) The overall size of each Single Window Counter to be 1650mm - 1800mm x 900mm - 975mm x 750mm + 1050mm x 450mm x 750mm.				
	(b) Tabletop of main table and side table to be made in 25mm block board with 6mm thick acrylic solid surface all the exposed surfaces to have 1mm thick Laminate (Laminate Base Rate Rs - 500/- Sq.M.) for horizontal surfaces and 1mm glossy laminate for vertical surfaces and double thickness				

	at edges alround. The 6mm thick acrylic solid surface to continue in the front side with curvature from the front table top to the modesty panel in front with cove lighting provision. (c) All other members to be with 19mmplywood / 2 Nos. of 6mm Flexi Plywood in curvature (which should be achieved with a frame work of 50mm x 50mm sal wood frame to be fixed from the front modesty panel / apron and the bottom of this niche to have provision of cove lighting with LED strips) and all exposed faces of the table to have 6mm thick acrylic solid surface as specified in the drawing to be used. (d) All the edges of 19mm plywood to have 18mm x 12mm plywood lipping. (e) One ready made key board tray. (Eco - KTE1 - 35 - Ebco make.) (f) One ready made hanging type pedestal for keeping CPU. (CPUSL, Ebco make.) (g) One Three Drawer Unit made with 18mm plywood and 12mm plywood. The unit to have one vertical filing drawer at bottom and two equal drawers on top. The rate to include all necessary hardware viz., telescopic drawer channels, handles, locks, etc., and 18mm x 12mm HDHMR BWR Grade edge lipping etc., (h) One Side Table with shutters made with 25mm block board top and 19mm plywood for all other members with necessary hardware viz., ' W ' hinges, SS handles, locks, SS tower bolts, etc., and 20mm x 6mm beech wood edge lipping etc., (i) All the unexposed faces to have 0.8mm Laminate OR minimum two coats of NO VOC or LOW VOC enamel paint with putty finish. (j) Ready Made Modular Foot Rest - 400mm x 350mm x 65mm. (k) All wooden members to have minimum two coats of NO VOC or LOW VOC duco paint finish. The cost to include the " L " shaped Single Window Counter and to include all materials, hardware, labour for a neat and finish job as per drawings and directions etc., complete.				
1.10.6	12MM TOUGHENED GLASS DIVIDERS FOR CUSTOMER TRANSACTION COUNTERS:	4.00		Each.	
	Providing, making and fixing in position 12mm thick toughened clear float glass in the half height partitions of Single Window Counters of approximate size 1150mm x 400mm - 100mm in tapered shape. All the edges of the glass to be polished for a smooth finish and the glass is to be fixed with " D " brackets. The cost to include all materials, labour, hardware etc., for a neat finished job as per drawings and diretions etc., complete.				
1.10.7	12MM TOUGHENED GLASS IN FRONT OF CUSTOMER AND TRANSACTION COUNTERS:	5.00		Each.	
	Providing, making and fixing in position 12mm thick clear float glass in the front side of approximate size 1650mm x 450mm with a central cut out of 200mm x 175mm. All the edges of the glass to be polished for a smooth finish and the glass is to be fixed with " D " brackets. The cost to include all materials, labour, hardware etc., for a neat finished job as per drawings and directions etc., complete.				
1.10.8	PANTRY UNIT:	1.00		Each.	
	Providing, making and placing in position Pantry Unit of overall size 2500 to 3450mm x 2650mm. The bottom of the unit from FFL to 800mm level to 600mm depth and the fop portion of the unit from 1400mm level to have depth of 450mm. The unit to be made with following specifications and as per drawings to a neat finish including cost all materials, hardware etc., complete. Storage units with horizontal partitions at not more than 900mm and the pantry unit top at 750mm level to have 19mm block board with 15mm granite and provision for 510mm x 510mm kitchen sink with pillar cock, angle cock, bottle trap and waste coupling (all of Jaguar or approved equivalent make) and all necessary hardware etc., The Storage units below				

	and above to have all necessary hardware viz., "W" hinges, handles, locks, magnetic ball catchers etc., The back of the unit to have 9mm plywood and the central 750mm portion to have cladding with glazed tiles of 200mm x 300mm. All the vertical partions and the shutters of the storage to have 19mm plywood.				
	All the exposed areas of plywood to have 1mm Laminate (Base Rate of Laminate Rs. 500/- Sq.M.) of approved shade and all the internal areas to have enamel painting with putty finish on all unexposed faces including melamine spray polish finish for all wooden members and all necessary hardware viz., 'W' or wing hinges, locks, handles, tower bolts etc., and beech wood edge lipping 20mm x 6mm etc., complete as per drawings and directions.				
1.10.9	WICKET GATE:	4.00		Each.	
	Same as item 1.1 above, but for height of 1200mm from finished floor level, to a neat finish as per drawings and directions etc.,				
1.10.10	NIGHT LATCH:	4.00		Each.	
	Providing and fixing night latch with three lock keys for wicket gate, to a neat finish as per drawings and directions etc.,				
2.0	OTHER WORKS:				
2.1	PAINTING:				
2.1.1	PLASTIC EMULSION PAINTING:	63.00		Sq.M.	
	Cleaning the surface of the wall / ceiling and then applying one coat of Wall Care putty followed by one coat of primer & then applying second coat of putty to give smooth finish exactly in line and level & then finally applying a minimum of two coats of NO VOC or LOW VOC Plastic Emulsion Paint of approved shade to give a neat finish including cost of all materials necessary scaffolding etc., complete for walls & ceiling.				
2.1.2	OIL BOUND DISTEMPER PAINTING:	15.00		Sq.M.	
	LOW VOC OR NO VOC OIL BOUND DISTEMPER PAINTING: Painting to new walls with 2 coats of ready mixed oil bound washable distemper of approved brand and shade over a base coat of appropriate primer of approved brand, making 3 coats in all to give an even shade after thoroughly brushing the surface to remove all dirt and remains of loose powdered materials, including cost and conveyance of all materials to work site and all operational, incidental, labour charges etc. complete for finished item of work.				
2.3	ACP CLADDING:	24.00		Sq.M.	
	Supplying and fixing aluminium composite cladding with skin material 0.5 mm thick aluminium sheet cover material natural polyethylene aluminium cladding panel fixed with extruded aluminium basis frame (50x25x1.5mm) angle cleats, weather sealants, rivets, GI brackets all as approved, using suitable bolts on structural steel work including necessary accessories complete in all respects including all labour charges etc., complete for finished item of work but excluding cost of structural steel fabrication, scaffolding charges, if any, ACP Cladding - 4 mm thick.				
2.4	ROLLER BLINDS:	16.00		Sq.M.	
	Providing and fixing in position of Roller Blinds of approved Fabric (Fabric Cost - RS. 1,000/- per Meter) of Hunter Douglas / Mac / Vista make or approved equivalent of approved shade etc., as directed. Note: (Window opening only considered for measurement. Roller blind should cover entire window opening without any gap on all sides)				
2.5	DESIGNER FILM WORK:	9.00		Sq.M.	
	Providing and fixing in position Designer Film with customized to the design and colors given as per drawings and heights mentioned. The Designer Film to be of Garware or equivalent approved make with necessary printing and as per sizes at site on the glass of partitions etc., The rate is for a finished item of work etc., complete as directed.				
2.6	DEEP CLEANING OF THE PREMISES.	1.00		Lot.	

	Cleaning of the premises on a day to day basis and disposing the debris out of the premises to the Contractor's Yard / Landfill before the commencement of the Bank every day. The scope includes cleaning of the premises and removing the debris created by the different Contractors viz., Interiors, Electrical, Civil, AC works and disposing of the debris as mentioned. The job also includes deep / fine cleaning of the existing premises daily and also handing over the site on day of inauguration and maintaining the premises till that time etc., complete as directed.				
	TOTAL FOR INTERIOR WORKS:				
	Note:				
	1. GST as applicable shall be paid extra.				
	2. All materials shall be selected by the SBI officials or Engineer-in-charge before execution.				
	3. All the quantities are approx. and executed as per site requirement.				
	4. The Bank reserves the right to select any of the brands indicated in the "List of Approved Makes" in case of delay in delivery of ordered 'make of item'.				
	5. The contractor cannot claim anything extra if the Bank changes the make but within the list of approved make.				
	6. Bidder shall visit/ inspect the site before quote.				