PRICE BID

BILL OF QUANTITIES FOR FURNITURE WORKS FOR STATE BANK OF INDIA, IDAR BRANCH, RBO-2,

Note: Rate should be inclusive of material, labour, tools, machinery, scaffolding, final disposal of debris, cleaning cutting wastage etc. All taxes, transportation etc. complete. (Excluding GST) GST will be paid as Applicable at the time of payment of Bills.

SN	Description	Quantity	Unit	Rate	Amount
	Note: Rate should be inclusive of material, labour, tools, machinery, scaffolding, final disposal of debris,				
I	**FURNISHING WORK**				
	FINISHING DETAILS IN NUTSHELL:				
	1) **Table Top :** 6 mm thick white corian				
	2) **Front Appron:** Round Corian and 6 mm thick blue lacquered glass fixed with Natural Silicon				
	3) **Facing of Drawers:** 1.00 mm thick laminate finish				
	The W.S. should have Ready Made Foot Rest. High impact polysterene with crome plated metal structure of approved make.				
	There should be provision for cable manager(Metal Cable Manager) system with necessary cutouts in top surface				
	C.P.U. trolly with castors/ roller supports/ Nylon castors.				
	Key board tray with mouse pad made from CRCA steel duly powder coated. It must have built-in slides which, must have a soft palm rest and a stow-away design of mousepad mounted underneath it.				
	All the internal surface (non visible surface) shall be provided with 0.60 mm thick balancing laminate of approved shade etc. complete				
	Heavy duty *telescopic full extension* sliding channel of approved make shall be used in all drawers.				
1	**SINGLE WINDOW COUNTER / CASH COUNTER SIZE 5'-0" X 2'-9" with White corian & blue lacquered glass**	5.00	NOS		
	Supplying, fixing and keeping in position single window counter complete as per design and drawing made out of 18				
	The cost shall be inclusive of S & F of a drawer unit or drawer & shelf unit with 18 mm thick commercial plywood and with approved make multipurpose Auto Lock in drawer and shelf unit. The cost shall also be inclusive of the following.				
[a]	size :				
	Description: L B H				
*	Writing Top 5'-0" 2'-9" 2'-6"				
*	4 Drawers with				
	pigeon hole 2'-0" 1'-3" 2'-0"				
*	Side Crdenza 3'-0" 1'-4" 2'-6"				



*	Side Credenza(Side Rack/Storage):For S.W Countwer Same as above item but Side Table Top and edges shall be finished with 6 mmThick White Corian on Top and Edges. All other visible surface shall be finished with 1.00 mm th laminate. Size shall be 3'-0"x 1'-4"x2'-6" ht. With openable shutter as directed				
[b]	Working table top and edges shall be finished with 6 mm thick white corian of DUPONT or equivalent approved make as per drawing and direction with all labour and material.				
[c]	Front Appron : 2 nos 6 mm thick flexy ply wood in round shape with 6 mm thick white corian shall be provided at front as per design. All edges should be finished with corian of DUPONT make.				
[d]	Front pannel shall be finished with 6 mm thick 18" high blue lacqured glass of approved make and fixed on 18 mm thick commercial ply wood with Natural Silicon gum as per manufacturer's specification and to be completed as per drawing				
[e]	All wood work shall be laquer polished to a smooth and uniform finish of choice colour and shade.				
[f]	All fittings like S.S. handle, Auto Lock to each drawer and cabinet doors, piano / auto hinges, ball catcher, stopper, metal cable manager etc. should be fixed of approved make.				
[g]	Counter shall be made independent in Length of 5'-0" and properly placed between two partitions. Counter will be measured in RMtr between two partition and paid.				
1 (a)	**Providing and fixing 12 mm thick Toughened Glass partition on counter top, front side,e lobby diafarm as follows.**	7.6	SQMT		
	Providing and fixing 12 mm thick Toughened float glass with polished edges to be fixed with necessary S.S Brush finish brackets & support on wooden partition as directed with necessary cut out in glass. All edges of glass shall have Diamond cut polished edges as directed.				
1(b)	Providing and fixing 12mm thick Toughened float Glass diapharm partition between Single Window counters as follows.	2.05	SQMT		
	12 mm thick Toughened clear float glass with polished edges shall be fixed with silicon and T.W beading support on wooden partition as directed. All edges of glass shall be Diamond cut polished edges as directed complete. Wooden partition will be paid seperately. Maximum length and height will be measured for payment purpose.				
II	**TABLES**				
	Note : for all work stations				
	FINISHING DETAILS IN NUTSHELL:				
	1) Table Top : 1.0 mm thick Dark laminat**e** & Burma Teak				
	2) Front Appron & Sides: 1.0 mm thick Dark Laminate				
	3) Facing of Drawers: 1.00 mm thick laminate finish				
	The W.S. should have Ready Made Foot Rest. High impact polysterene with crome plated metal structure of approved make.				



	There should be provision for cable manager(Metal Cable Manager) system with necessary cutouts in top surface				
	C.P.U. trolly with castors/roller supports/ Nylon castors.				
	Key board tray with mouse pad made from CRCA steel duly powder coated. It must have built-in slides which, must have a soft palm rest and a stow-away design of mousepad mounted underneath it.				
	All the internal surface (non visible surface) shall be provided with 0.60 mm thick balancing laminate of approved shade etc. complete				
	Heavy duty *telescopic full extension* sliding channel of approved make shall be used in all drawers.				
2	**MANAGER TABLE SIZE: 6'-0" X 2'-9" X2'-6" HT. with Side Credenza & Laninate finish on Table Top , sides and all other visible surfaces etc complete as follows**	1.00	NO		
2.1	Supplying and installation of Table as per the following description : Size 6'-0" x 2'-9". Table top shall be made from 18 mm thick commercial ply wood with 1.0 mm thick Laminate with necessary intermediate support. Table top shall be supported by 18 mm thick commercial ply wood with wooden framing. Drawers of size of 1'-3" x 2'-0" x 2'-6" shall be provided using 18 mm thick commercial ply wood having 4 Nos drawers as directed with heavy duty telescope sliding channel of approved make , grouplock, S.S. Handle. Ready made metal Key board with mouse pad of approved make shall be provided. Exposed surfaces of darwers shall have laminate, All internal surface will have 0.60 mm thick balacing laminate				
2.2	Apron (Modesty Panel) made from 18 mm thick ply wood finished with laminate as per drawing				
2.3	Table side made from 18 mm thick ply wood with 1.0 mm thick Laminate finish shall be provided in a pattern as per drawing. Laminate to be provided on all visible surfaces.				
2.4	Drawer Fascia made out of 18 mm thick Plywood. The sides/back/base of drawers be made of 12 mm thick Ply wood & Bottom of drawers shall be of 6 mm thick ply wood. fixing laminate on front side and all the internal surfaces shall be 0.60 mm thick balancing laminate. The drawers to be fitted with Telescopic sliding channel with SS Group locks of approved make and 100 mm long brush finish Stainless Steel handles for each drawer. All the edges of Drawer Fascia be provided with teak wood edge bending with laquer polished etc complete as directed				
2.5	Table shall have stand for keeping CPU and metalic cable Manager shall be provided in table top. All exposed edges of teak wood shall have polished with smooth edges & corners				
2.6	Exposed edges of Table Top, Leg panel & Side Shelf shall be made 36 mm thick by providing additional 18 mm thick ply wood patta of required width.				
2.7	All the internal surface (non visible surface) shall be provided with 0.60 mm thick balancing laminate of approved shade. etc. complete.				
2.8	All the surface without laminate / balancing laminate shall be lacquered polished of approved shade				




2.9	Side Credenza Size 3'-6" x1'-6" x 2'-6" ht. Openable shutter with 1.00 mm thick Laminate finish on Top , front, sides, shutter and 35 mmx 6 mm thick Burma Teak beading on Top Edges. Laminate to be provided only on visible surface etc complete as follows. Only Front elevation will be measured for payment purpose. (For BM & Officer's) Rate for length Less then 3'-3"				
2.10	Exposed edges of Sides, Table Top shall be made 36 mm thick by providing additional 18 mm thick ply wood patta of required width.				
2.11	All the internal surface (non visible surface) shall be provided with 0.60 mm thick balancing laminate				
3	Same as details of above Item-no-2A but Size: **5'-0"x2'-6"** with side credenza (size 3'-0" x 1'-6" x 2'-6") & with 4 Nos Drawer Unit with 1.0 mm thick Laminate finish on all exposed surfaces	6.00	NO		
4	**GRAHAK MITRA TABLE OF 2'-6" WIDE with laminate finish**	1.52	RMT		
4.1	Same as details of above item no 2 but Size 2'-6" wide with storage unit in Table with 4mm thick MDF board + Blue and white laminate finishing on all exposed visible surface as per drawing and instruction of Architect/Bank For Grahak Mitra/Tech Mitra (Help Desk Table)				
4.2	Table top made from 18 mm thick ply wood + 4mm thick MDF board with laminate finish				
4.3	Apron (Front side) made from 18 mm thick ply wood + 4mm MDF board withlaminate finish				
4.4	Both sides made from 18 mm thick ply wood + 4mm MDF board with laminate finish				
4.5	3" thick Partition above working table top made from 18 mm thick+6 mm thick ply wood with necessary framing with 4mm thick MDF board + laminate finish as per drawing.				
4.6	Exposed edges of Table Top shall be made 36 mm thick by providing additional 18 mm thick ply wood patta of required width.				
4.7	Drawer Storage Unit- 1'-4" W x 2'-0" D, 2 Nos Drawer on top and rest 1 No shutter				
4.8	All the internal surface (non visible surface) shall be provided with 0.60 mm thick balancing laminate				
4.9	**FINISHING DETAILS IN NUTSHELL:**				
	1**) Table Top :** 18 mm Thick Plywood with 4 mm thick MDF with High gloss white laminate **2) Front Appron & Sides:** 4mm thick MDF with High gloss white/blue laminate **3) Facing of Drawers:** 1.0 mm thick Laminate finish				
5	**DINING TABLE Approx Size 6'-0"/ 5'-0"x 3'-0"**	1.70	SQ MT		
	Supplying and installation of Dining Table of 2'-6" height, 1" x 1.5" ht. T.W beading shall be fixed on border. Top shall be made of 18 mm thick commercial plywood with additional 18 mm thick Ply wood patta of required width on edges with 1.0 mm thick laminate on top of approved shade and supports of the Table shall be made of 2" x 2" T.W. members in a Design as directed. All surfaces not laminated shall be lacquer polished.				



	Exposed edges of Table Top shall be made 36 mm thick by providing additional 18 mm thick ply wood patta of required width. [Only Top shall be measured for payment purpose.]				
6	**Supplying and installation Dressing Table with Puffy as follows.**	1.00	NO		
	Dressing Table shall have 1'-6" x 4'-0" size 5mm thick mirror with 1 1/2" x 3" T.W frame and 12 mm thick BWR plywood 2'-0" x 6" size with 1 mm thick laminate on top and having polished edges / bottom supported by brass bracket 2 Nos. as directed. Puffy shall be made of using TW member of size 2"x2" and 18 mm th.plywood for seat support. Seat shall be padded with 4" foam covered with hession cloth and upholstered with Approved shade and quality fabric. Basic price of fabric shall be Rs.400 per Rmt. Visible wooden support shall be polished. Size of Puffy shall be 1'6"x1'6".				
7	**Supplying and installation 2'-0" x 2'-0"x 1'-3" height Center Tepoy as follows.**	4.00	NO		
	Providing and making open box structure type Tepoy made out of 36 mm (2X18) thick plywood with all over 1.0 mm thick laminate finish provided with bevelled & diamond polished edges 12mm thick glass top supported on 75 mm X 25 mm SS studs complete as directed.				
8	**CUSTOMER WRITING DESK**	1.00	NO		
	Writing Desk Size 3'-0" L x 1'-3" x (0'-6"+3'-0") ht. Verticle Sides and bottom shall be made out of 36 mm (2X18) thick Commercial plywood and back side 12 mm thick ply wood with Laminate on Top and Edges on all sides including inside divisions. Top shall be made from 12mm th Thoughend glass with polished edges making different divisions by 18 mm thick glass / plywwod with laminate on both side for slips or forms as per detail drawing and inststruction complete. Laminate to be provided on all visible surface				
III	**Storage/Boxing cabinets of All Heights**				
9	**STORAGE CABINET with Top & Front laminate finished. Storage of any height** Storage of Size 3'-3"x1'-4" x 2'-6"/3'-0" ht. Openable shutter with 1.00 mm thick Laminate finish on Top , front, sides, shutter and 35 mmx6 mm thick Burma Teak beading on Top Edges. Laminate to be provided only on visible surface etc complete as follows. Only Front elevation will be measured for payment purpose. Rate for length Less then 3'-3" Same details as side credenza with all external surfaces to be finished with Laminate (approved shades)	20.00	SQMT		
	FINISHING DETAILS IN NUTSHELL: 1) Top : Dark Laminate & Burma Teak beading on Edges with pilishade 2) Front Appron & Sides: Dark Laminate/Frosty white Laminate as per design & instructions				



10	**P/F ELECTRIC CUB BOARD**	4.00	SQMT		
	Providing and fixing Electric cup board using 18 mm thick Bison board for inside verticle division, shelves and shutter. Aluminium framing of 50x25x1.20mm thick with 6 mm thick Bison board on both side for outer partition with 1.0 mm thick laminate on all exposed surface and polishing/ synthetic enamal paint on all internal surface. Shutter will have approved make lock, handle, hinges, ball catches & S.S Perforated jali etc.complete as directed. Depth of cup board will be around 1'-3". Height of shutter will be maximum 7'-0". Only Front elevation shall be measured for payment purpose.				
11	**P/F PANTRY PLATFORM CUB BOARD SHUTTER**	2.00	SQMT		
	Providing and fixing cupboard shutters and with 3 drawers below pantry platform using 1 1/2" x 2 1/2" second grade T.W members for frame, 18 mm Tk plywood with 1.0 mm lamiante for shutters. Providing 1/2" th T.W beading all around shutter. Providing S.S hinges, Handles, stoppers and magnetic catch as directed. All the without lamiante surface shall be polished/ synthetic enamal paint as directed complete.Providing and fixing 0.60 mm thick balancing laminate on internal shutter surface. Heavy duty telescopic full extension sliding channel of approved make shall be used in all drawers.				
IV	**Partitions & Doors**				
	The rate to include provision of extra frame work as necessary for skirting and making openings for glazing & Door etc, cutouts for electrical switch plates, switch boxes, light fittings etc making provision for laying conduits as per drawings & direction.				
IV-A	**LOW HEIGHT PARTITION WORK**				
12	**P/F LOW HEIGHT BOTH SIDE LAMINATE PARTITION FOR BACK SIDE AND IN BETWEEN S.W COUNTER AND CASH CABIN WITH TOUGHENED GLASS**	11.60	SQMT		
	Providing and fixing low height partition using 50mm x 25mm x 1.50mm thick Aluminium members maximum in grid of 2'-0" x 2'-0" fixing 12 mm thick MDF Board exterior grade / 6 mm thick ply of approved brand on both side of aluminium framing and fixing 1.0 mm thick laminate of approved shade on both sides, fixing 12 mm thick transparent toughened glass as directed. Applying polish on exposed steam beach members with lacquer polished edges as directed. Laminate to be provided only on visible surface. **For Low height Single window and Cash cabin partition, Average height of partition shall be measured and paid.**				
13	**PROVIDING AND FIXING WICKET GATE WITH BOTH SIDE LAMINATE**	1.00	SQMT		
	Same as item no 12 but P/F 30 / 32 mm thick flush shutter with both side laminate including SS hinges with countersunk SS screws, Aprroved make Night latch Lock, S.S Handles,Door stoppers, doorstop etc complete as directed.				
14	**P/F LOW HEIGHT BOTH SIDE LAMINATE PARTITION WITH CLEAR FLOAT GLASS**	13.50	SQMT		

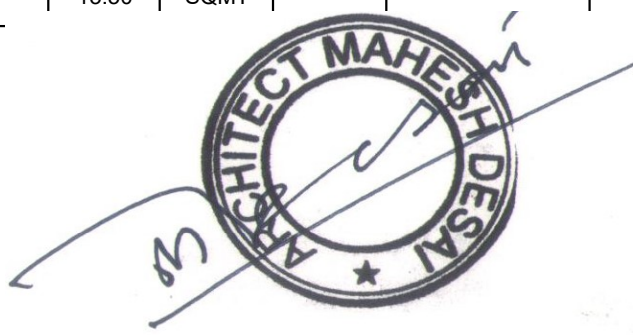

	Providing and fixing low height partition using 50mm x25mm x 1.50mm thick Aluminium members maximum in grid of 2'-0" x 2'-0" fixing 12 mm thick MDF Board exterior grade / 6 mm thick ply of approved brand on both side of aluminium framing and fixing 1.0 mm thick laminate of approved shade on both sides. Fixing 12mm thick free clear float glass as directed. Applying lacquer polish on exposed steam beach members / edges as directed. Laminate to be provided only on visible surface Providing pinup board of soft board covered with fabric and fixed in partition as per design/instruction complete as directed.				
IV-B	**FULL HEIGHT PARTITION WORK**				
	Measurement of height shall be taken from finished floor level upto the level of false ceiling, in case of varying heights on either side of partition, average height shall be considered. No extra payment shall be made for members going up to slab/beam bottom.				
14	**P/F BOTH SIDE LAMINATE SOLID/ PARTLY GLAZED FULL HEIGHT PARTITION WITH DOOR WITH DOOR CLOSURE**	30.00	SQMT		
	Providing and fixing both sides laminate full height partly glazed partition using 50mm x 25mm x 1.50mm thick Aluminium members in a maximum grid of 2'-0" x 2'-0" fixing 12 mm thick MDF Board exterior grade / 6 mm thick ply on both sides,1.0 mm laminate of approved make shall be fixed on MDF / plywood. Providing and fixing 5.0/8.0 mm thick float glass as directed in the partition. Providing and fixing door shutter using 32 mm thick flush shutter both side laminated and fixing 6 mm thick glass with beading patti, 5" Long 3 Nos stainless steel hinges, doorstop shall be provided as directed. Godrej Mortice lock shall be provided in door shutter.Providing and fixing "Dorma/Ozone/Godrej " or equivalent make door closure. All visible members if not laminated shall have lacquer polished as directed.				
V	**GLASS DOORS AND PARTITIONS**				
15	**P & F FULLY GLAZED DOOR WITH PATCH FITTINGS**	2.00	SQMT		
	Providing & Fixing fully glazed door includes fixing of **12 mm th. Toughened glass** with the help of **top patch & bottom patch fittings.** The door will have patch lock, pti pivot, 100 Kg floor spring & 25mm dia D shape 400 mm long handles both sides,, fixed with the glass by making necessary cutouts & holes. The glass edges shall be polished on all sides. The entire door shall be erected in complete line & level. The door will have S.S brush finish Signage for pull & push.				
	The patch fittings of approved make shall be of aluminium with s,s, matt finish coating & signage shall be of kich make. The entire door complete in all respect should be installed in positions as required.				
16	Same as above item but P & F FULLY GLAZED PARTITION up to 7'-0" height fixed with solid wooden partition (above 7'-0") & with Patch Fitting for fixed partition.	10.20	SQMT		



VI	**PANELLING WORK**				
18	**P/F Wall panelling with laminate finishing for wall and Pillar etc**	50.00	SQMT		
	Providing and laying panelling on walls & pillars having 12 mm thick MDF Board exterior grade / 6 mm thick ply and 1.0 mm th laminate fixed on wall & pillars with Aluminium. framing of 25mmx25mmx1.20mm thick at maximum 2'-0" c/c bothways on wall and pillar etc complete as directed as per design and instruction of Architect. .				
19	Providing and fixing 8mm thick MDF Board exterior grade with jali work with high gloss PU coating over central column having 8mm thick MDF Board Exterior grade covered with 1 mm thick blue glossy laminate fixed on pillar with aluminium framing of 25mm x25mm x1.20 mm thick at maximum 2'-0" c/c bothway as per drawing and direction with all labour and material etc complete. **(Rate shall be including CNC cutting jali work and 1 mm thick blue glossy laminate behind design jali work as directed)**	5.00	SQMT		
20	**Panelling for Digital wall with Blue / white high gloss PU Coating finishing**	5.60	SQMT		
	Providing and laying panelling on wall having 8mm th MDF Board exterior grade with PU coating fixed on wall with Aluminium framing of 25mm x 25mm x 1.20 mm thick at maximum 2'-0" c/c bothways etc. complete as directed. Only front elevation surface area shall be measured for payment.				
21	**Panelling for Display wall with 3M Vinyl glossy Film with printed design**	3.00	SQMT		
	Providing and laying panelling on wall having 8 mm th MDF Board exterior grade with 3M vinyl glossy films with printed design fixed on wall with Aluminium framing of 25mmx25mmx1.20mm thick at maximum 2'-0" c/c bothways etc. complete as directed. panelling as per design and instruction of Architect. MDF board to be finished with 0.60 mm thick laminate or paint before laying 3M film. Only Front elevation area shall be measured for payment purpose.				
	Exposed edges of Display wall four side shall be made 36 mm thick by providing additional required thickness MDF patta of required width.				
22	**P/A WALL PAPERS on Digital wall** Providing and applying Wall paper approved by Architect / Bank's Engineer having basic price of Rs 100=00 Per Sq.Ft	14.10	SQMT		
23	**ALUMINUM COMPOSITE PANEL FOR E-LOBBY**	51.00	SQMT		
	Providing and fixing 3 mm thick aluminium composite panel of Flexi Bond / Euro Bond / Timex with 0.25 mm foil with 50 mm x 25 mm x 1.20 mm thick aluminium hollow section tray system with minimum 20 mm bending with silicon Dow Coming of GE seal proof - ACP of approved indian make complete as per selection and direction of Architect for front facade for the building. This item will be carried out as per manufacturer's specifications. Rate also includes providing trap door shutter with hinges, stoppers etc complete as directed. **Design as per Bank standered Drawing and Architect's instructions etc complete. TIMEX - DIAMOND WHITE - 111, NAVY BLUE - 117 or equivalent**				



VII	**FALSE CEILING WORK**				
24	**P/F GYPSUM BOARD FALSE CEILLING**	135.00	SMT		
	Providing and fixing Gypsum board 12.50 mm thick false ceiling in steps and design using Original Indian Gypsum board with original GI sheet section **of Gypsteel ULTRA (Gypsteel Ultra shall be used)** supporting system in line and level. Finishing the surface and **applying 3 coats of Plastic emulsion paint** as directed complete. Entire work to be done as per standard specifications of Saint Gobin Gyproc India. **After completion of work, certificate from Saint Gobain Gyproc Company shall be submitted along with bill stating that work is satisfactorily completed as per their specification.** **Note :** (1) Rate includes making necessary cut-outs for lighting fixtures (2) Pattas if any shall be measured in SqM and not in RMt and paid in SqM (3) Only finished visible surface area shall be measured for payment				
25	Same as above but providing and fixing of 8 mm thick MDF board strip with Blue shade high gloss PU Coating instead of Gypsum Board for Item No-1 over Transaction Area etc complete as per design and instruction. Only finished surface area shall be measured for payment.	3.15	SMT		
26	Providing and Fixing of Armstrong Mineral Fibre Accoustical Suspended ceilling system with FINE FISSURED (MICRO LOCK) EDGE TILES With Armstrong Silhouette Exposed Grid Using Silhouette Grid with Fine Fissured microlook Edge Tiles. With necessary Angles at junctions as per company specifications as directed complete. Rate includes necessary cut outs for A/C Grills, diffusers light fixtures complete as directed. **Cutout for light and Diffusers will be deducted from area. Only Tiles cost will be deducted for payment purpose.** After completion of work, certificate from Company to be obtained and submitted with bill that work is carried out as per their specifications.	126.00	SMT		
VIII	**SOFT BOARD**				
27	Providing & fixing soft board for pin up using moulded Steam beach frame of 1" x 1/2" with 6 mm thick commercial plywood on back side and 12mm th soft board on front covered with cloth of selected design of Basic rate of Rs. 150 per Rmt. Steam beach member shall have lacquer polish as directed.	1.50	SQMT		
IX	**ROLLER BLINDS**				
28	Supplying and fixing Roller Blind Blackout of approved make with selected fabric of approved design and shade. (Basic Price of Rs 135=00 Per Sq.Ft Excluding GST)	6.10	SQMT		



X	**FROSTED FILM**				
29	Providing and Fixing Frosted polyster film of 3M (Scotchcal 7725 - 324) or equivalent make over glass surface as per drawing & direction with all labour & materials to the satisfaction of the Architect/Bank as per manufacturer's specification. No deduction will be made for any cutting in the film.	30.00	SQMT		
XI	**POSTER**				
30	Providing and Fixing 2 nos sheets of 24"x 36" clear acrylic sheets (poster to be sandwitched in betweem). Outer sheet is 5 mm thick and bevelled crystal edge polished for 3/4" wide at 8-10 degrees on all sides and the Rear sheet is 5 mm thick flat etc complete as directed.	1.20	SQ.MT		
31	Same as above but of size of 18"x 24" (poster to be sandwitched in between)	3.00	NO		
32	Supplying and installation suggestion /complain box made from 5 mm thick Acrylic sheet of size 230mm x305mm x 150mm depth with openable hinged shutter and slot for putting suggestions / complain with lockable arrangment as per design and instruction.	1.00	NO		
XII	**MISCELLANEOUS**	5.00	RMT		
38	Preparing wooden square box of 3'-0" x 1'-6" (depth) using 18mm ply to accomodate the cassate AC machine and to be fixed with the RCC slab/beam. The box should be finished with synthetic enamel paint.	3.00	NO		
				TOTAL COST "A"	
				SAY	

Note:

[a] In all furniture work, contractor shall make necessary cutout in panelling/partitions / wooden members to facilitate electrical/data cabelling and No extra amount shall be paid for this.

[b] All internal surface (non visible surfaces) shall be provided with the 0.60 mm thick balacing laminate of aproved make & shade in the all S.W Counters/Tables/ Credenza,Storage Cup Board etc.

